


0.25W, FIXED INPUT, ISOLATED&UNREGULATED DUAL/SINGLE OUTPUT DC-DC CONVERTER



FEATURES

- ◆ Small Footprint
- ◆ 1KVDC Isolation

MODEL SELECTION

QB^①05^②05^③X^④LS^⑤

- ① Product Series
- ② Input Voltage
- ③ Output Voltage
- ④ Fixed Input
- ⑤ SIP-7 Package

PRODUCT PROGRAM

Part Number	Input		Output		Efficiency (% Typ)		
	Voltage (VDC)		Voltage (VDC)	Current (mA) Max			
	Nominal	Nominal					
QB0303XLS	3.3	3.0-3.6	3.3	75.8	62		
QB0305XLS			5	50	65		
QA0505XS	5	4.5-5.5	±5	±25	62		
QA0509XS			±9	±13.8	64		
QA0512XS			±12	±10.4	66		
QA0515XS			±15	±8.3	65		
QB0505XLS			5	50	64		
QB0509XLS			9	27.8	65		
QB0512XLS			12	20.8	67		
QB0515XLS			15	16.7	65		
QA1205XS			12	10.8-13.2	±5	±25	62
QA1209XS					±9	±13.8	63
QA1212XS	±12	±10.4			64		
QA1215XS	±15	±8.3			65		
QB1203XLS	3.3	75.8			62		
QB1205XLS	5	50			65		
QB1209XLS	9	27.8			66		
QB1212XLS	12	20.8			67		
QB1215XLS	15	16.7			66		
QA2405XS	24	21.6-26.4			±5	±25	63
QA2409XS			±9	±13.8	64		
QA2412XS			±12	±10.4	65		
QA2415XS			±15	±8.3	65		
QB2405XLS			5	50	63		
QB2409XLS			9	27.8	63		
QB2412XLS			12	20.8	65		
QB2415XLS			15	16.7	65		
QB2424XLS			24	10.4	64		

COMMON SPECIFICATIONS

Item	Test conditions	Min	Typ	Max	Units
Storage humidity				95	%
Operating Temperature		-40		85	°C
Storage Temperature		-55		125	
Temp. rise at full load			15	25	
Lead temperature	1.5mm from case for 10 seconds			300	
Short circuit protection*				1	s
Cooling		Free air convection			
Case material		Plastic (UL94-V0)			
MTBF		3500			K hours
Weight			2.1		g

*Supply voltage must be discontinued at the end of short circuit duration.



CE REACH
MICRODC RESERVES THE COPYRIGHT

ISOLATION SPECIFICATIONS

Item	Test conditions	Min	Typ	Max	Units
Isolation voltage	Tested for 1 minute and 1 mA max	1000			VDC
Isolation resistance	Test at 500VDC	1000			MΩ

OUTPUT SPECIFICATIONS

Item	Test conditions		Min	Typ	Max	Units
Output power					0.25	W
Line regulation	For Vin change of ±1%	(3.3V input)			±1.5	
		(Others input)			±1.2	
Load regulation	10% to 100% load	(3.3V output)		12	20	%
		(5V output)		10.5	15	
		(9V output)		8.3	15	
		(12V output)		6.8	15	
		(15V output)		6.3	15	
Output voltage accuracy	See tolerance envelope graph					
Temperature drift	100% full load				0.03	%/°C
Ripple & Noise*	20MHz Bandwidth			50	75	mVp-p
Switching frequency	Full load, nominal input			100		KHz

*Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing .

Note:

1. All specifications measured at T A =25°C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
2. See below recommended circuits for more details.
3. Dual output models unbalanced load: ±5%.

APPLICATION NOTE

Requirement on output load


To ensure this module can operate efficiently and reliably, During operation, the minimum output load is not less than 10% of the full load, and that this product should never be operated under no load! If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load.

Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against overload. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

Recommended circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).

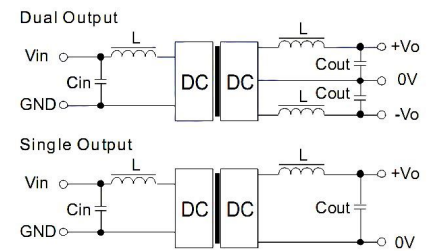


(Figure 1)

It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. It's not recommended to connect any external capacitor in the application field.

Output Voltage Regulation and Over-voltage Protection Circuit

The simplest device for output voltage regulation, over-voltage and over-current protection is a linear voltage regulator with overheat protection that is connected to the input or output end in series (Figure 2).

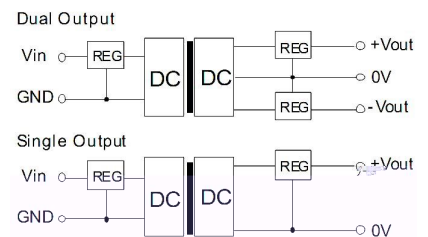

(Figure 2)

No parallel connection or plug and play.

TYPICAL CHARACTERISTICS

