


### 1W, FIXED INPUT, ISOLATED DUAL OUTPUT SMD DC-DC CONVERTER

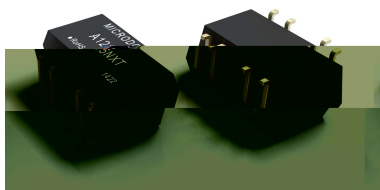

- ◆Footprint over pins 1.64cm<sup>2</sup>
- ◆Short Circuit Protection(automatic recovery)
- ◆I/O isolation voltage 1000VDC
- ◆Operating Temperature: -40℃~ + 85℃
- ◆High efficiency up to 78%
- ◆Toroidal magnetics
- ◆Small SMD package with footprint
- ◆Power density 1.36W/cm<sup>3</sup>
- ◆Lead frame technology
- ◆Multi-layer ceramic capacitors
- ◆Custom solutions available

① ② ③ ④ ⑤ ⑥

- ① Product Series
- ② Input Voltage
- ③ Output Voltage
- ④ No Pin
- ⑤ Fixed Input
- ⑥ SMD Package

The A-NXT series are miniature,1W DC/DC converters with high isolation in a SMD package. With a new package design these converters are qualified for the higher temperatures requested by lead-free reflow solder processes. With the small footprint, these converters are the ideal solution for board level power distribution,mainly for applications in the industrial and telecom field. For automated SMD production lines the devices can be supplied in standard tape and reel package.



**CE REACH**  
MICRODC RESERVES THE COPYRIGHT

SELECT I N I E							
Order code	Input		Output		Efficiency (%.Typ.)	Isolation Capacitance pF	MTTF <sup>1</sup> KHrs
	Voltage(VDC)	Current (mA)	Voltage (VDC)	Current (mA)			
	Nominal	Rated Load					
A0303NXT	3.3	402	±3.3	±152	81	29	1005
A0305NXT	3.3	388	±5	±100	83	30	399
A0309NXT	3.3	405	±9	±55	74	34	827
A0312NXT	3.3	390	±12	±42	76	40	375
A0315NXT	3.3	392	±15	±33	81	42	206
A0503NXT	5	259	±3.3	±152	85	31	964
A0505XT	5	290	±5	±100	83	33	1697
A0505NXT	5	251	±5	±100	86	42	367
A0509NXT	5	267	±9	±55	85	38	682
A0512NXT	5	260	±12	±42	74	44	343
A0515NXT	5	256	±15	±33	78	43	188
A1205NXT	12	121	±5	±100	80	50	559
A1209NXT	12	113	±9	±55	80	72	375
A1212NXT	12	111	±12	±42	85	89	243
A1215NXT	12	110	±15	±33	81	100	154

1. Calculated using MIL-HDBK-217F with nominal input voltage at full load.  
All specifications typical at TA=25℃, nominal input voltage and rated output current unless otherwise specified.

I CT						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Voltage range	Continuous operation, 3V input	2.97	3.3	3.63	VDC	
	Continuous operation, 5V input	4.5	5	5.5	VDC	
	Continuous operation, 12V input	10.8	12	13.2	VDC	
Start up time			41	50	mA p-p	

I CT						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Isolation voltage	Flash tested for 1 second	1000			VDC	
Resistance	Viso= 1000VDC	10			GΩ	

CT						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Switching frequency	0312, 0315		100		kHz	
	0303, 0305, 0503, 0505		110		kHz	
	All other variants		115		kHz	

A a r c e i	
Parameter	Conditions
Lead temperature 1.5mm from case for 10 seconds	300℃
Internal power dissipation	700mW
Input voltage V , A03 types	5.5V
Input voltage Vin, A05 types	7V
Input voltage Vin, A12 types	15V

S s					
Parameter	Conditions	Min.	Typ.	Max.	Units
Rated Power	TA=-40°C to 85°C	0.1		1.0	W
Voltage Set Point	See tolerance envelope				
Line regulation	High VIN to low VIN		1.0	1.2	%
Load regulation <sup>1</sup>	10% load to rated load, 0303& 0503		10	15	%
	10% load to rated load, 5V output types		10	12	%
	10% load to rated load, 0309		9.0	10	%
	10% load to rated load, 0509 & 1209		6.5	8.0	%
	10% load to rated load, 0312 & 0315		11	14	%
	10% load to rated load, 0512 & 1212		6.0	8.5	%
	10% load to rated load, 0515 & 1215		6.0	7.0	%
Ripple & Noise	BW=DC to 20MHz, 3.3V output types, A0305 & A0505		40	80	mV p-p
	BW=DC to 20MHz, all other 5V output types		50	100	mV p-p
	BW=DC to 20MHz, 9V output types		35	80	mV p-p
	BW=DC to 20MHz, 12V output types		50	110	mV p-p
	BW=DC to 20MHz, 15V output types		65	110	mV p-p

Note:1. 12V input types have typically 3% less load regulation change.

T c CT					
Parameter	Conditions	Min.	Typ.	Max.	Units
Specification	All output types	-40		85	°C
Storage		-55		125	°C
Case temperature rise	0305, 0505, 0312, 0315		19		°C
	above		25		°C
	0303, 0309, 0503		46		°C
	0505, 1205		35		°C
ambient	All other variants		35		°C
Cooling	Free air convection				

**T T**

‘Hi Pot Test’, ‘Flash Tested’, ‘Withstand Voltage’, ‘Proof Voltage’, ‘Dielectric Withstand Voltage’ & ‘Isolation Test Voltage’ are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.


Professional Power Module A-NXT series of DC/DC converters are all 100% production tested at their stated isolation voltage. This is 1KVDC for 1 second.

A question commonly asked is, “What is the continuous voltage that can be applied across the part in normal operation?”

For a part holding no specific agency approvals, such as the A-NXT series, both input and output should normally be maintained within SELV limits i.e. less than 42.4V peak, or 60VDC. The isolation test voltage represents a measure of immunity to transient voltages and the part should never be used as an element of a safety isolation system. The part could be expected to function correctly with several hundred volts offset applied continuously across the isolation barrier; but then the circuitry on both sides of the barrier must be regarded as operating at an unsafe voltage and further isolation/insulation systems must form a barrier between these circuits and any user-accessible circuitry according to safety standard requirements.

It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. The A-NXT series has toroidal isolation transformers, with no additional insulation between primary and secondary windings of enameled wire. While parts can be expected to withstand several times the stated test voltage, the isolation capability does depend on the wire insulation. Any material, including this enamel (typically polyurethane) is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

This consideration equally applies to agency recognized parts rated for better than functional isolation where the wire enamel insulation is always supplemented by a further insulation system of physical spacing or barriers.

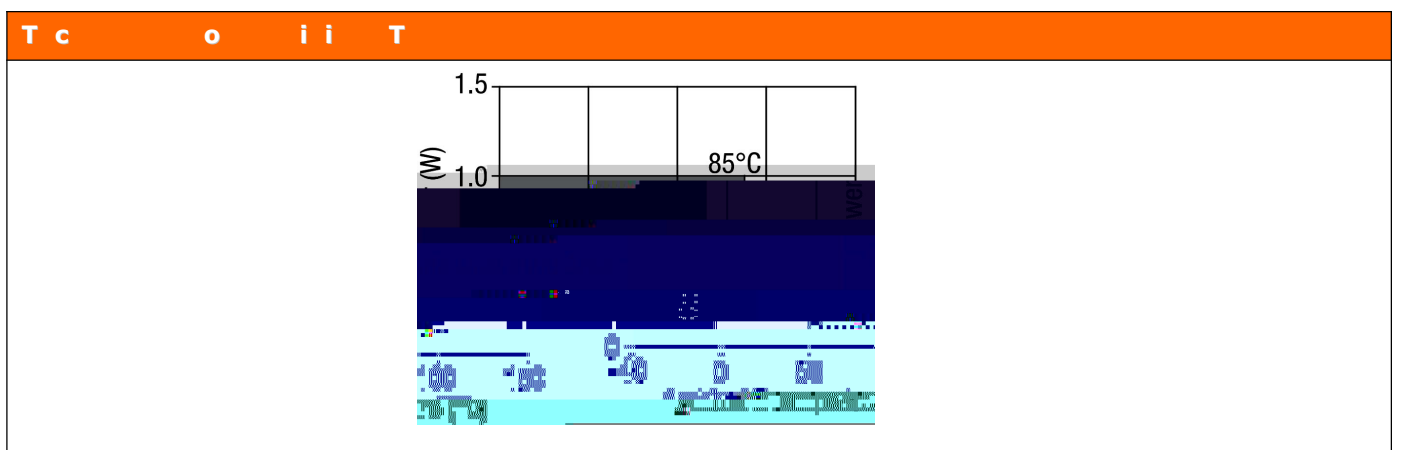

**A N**

The minimum load to meet data sheet specification is 10% of the full rated load across the specified input voltage range. Lower than 10% minimum loading will result in an increase in output voltage, which may rise to typically double the specified output voltage if the output load falls to less than 5%.

Typical start up times for this series, with a typical input voltage rise time of 2.2  $\mu$ s and output capacitance of 10  $\mu$ F, are shown in the table below. The product series will start into a capacitance of 47  $\mu$ F with an increased start time, however, the maximum recommended output capacitance is 10  $\mu$ F.

	Start-up time		Start-up time
	$\mu$ s		$\mu$ s
A0303NXT	1630	A0509NXT	6850
A0305NXT	1359	A0512NXT	11560
A0309NXT	3435	A0515NXT	15640
A0312NXT	6590	A1205NXT	1154
A0315NXT	25340	A1209NXT	4050
A0503NXT	1599	A1212NXT	7995
A0505NXT	2185	A1215NXT	11200
A0305NXT	1395		

Ripple and noise measurements are performed with the following test configuration.

- C1 1  $\mu$ F X7R multilayer ceramic capacitor, voltage rating to be a minimum of 3 times the output voltage of the DC/DC converter
- C2 10  $\mu$ F tantalum capacitor, voltage rating to be a minimum of 1.5 times the output voltage of the DC/DC converter with an ESR of less than 100m $\Omega$  at 100 kHz
- C3 100nF multilayer ceramic capacitor, general purpose
- R1 450  $\Omega$  resistor, carbon film,  $\pm$ 1% tolerance
- R2 50  $\Omega$  BNC termination
- T1 3T of the coax cable through a ferrite toroid
- RLOAD Resistive load to the maximum power rating of the DC/DC converter. Connections should be made via twisted wires

Measured values are multiplied by 10 to obtain the specified values.


### A N

By using the values of inductance and capacitance stated, the output ripple at the rated load is lowered to 5mV p-p max.

Capacitor: It is required that the ESR (Equivalent Series Resistance) should be as low as possible, ceramic types are recommended.

The voltage rating should be at least twice (except for 15V output), the rated output voltage of the DC/DC converter.


Inductor: The rated current of the inductor should not be less than that of the output of the DC/DC converter. At the rated current, the DC resistance of the inductor should be such that the voltage drop across the inductor is <2% of the rated voltage of the DC/DC converter. The SRF (Self Resonant Frequency) should be >20MHz.

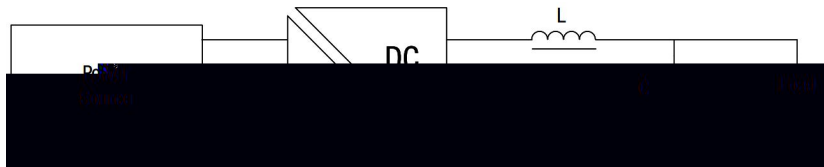


	Inductor			Capacitor
	L, $\mu$ H	SMD	Through Hole	C, $\mu$ F
A0303NXT	10	82103C	11R103C	4.7
A0305NXT	22	82223C	11R223C	2.2
A0309NXT	22	82223C	11R223C	2.2
A0312NXT	47	82473C	11R473C	1
A0315NXT	220	82474C	11R474C	0.22
A0503NXT	10	82103C	11R103C	4.7
A0505NXT	10	82103C	11R103C	4.7
A0305NXT	10	82103C	11R103C	4.7
A0509NXT	22	82223C	11R103C	2.2
A0512NXT	47	82473C	11R223C	1
A0515NXT	220	82474C	11R473C	0.22
A1205NXT	10	82103C	11R474C	4.7
A1209NXT	22	82223C	11R223C	2.2
A1212NXT	47	82473C	11R473C	1
A1215NXT	220	82474C	11R474C	0.22

### T E I

Tolerance Envelope - 3.3V output types.

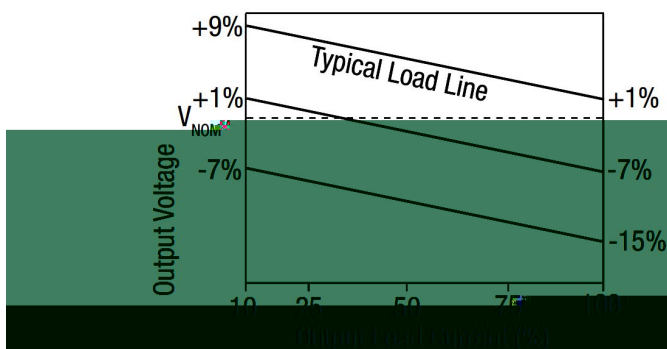


All other types.

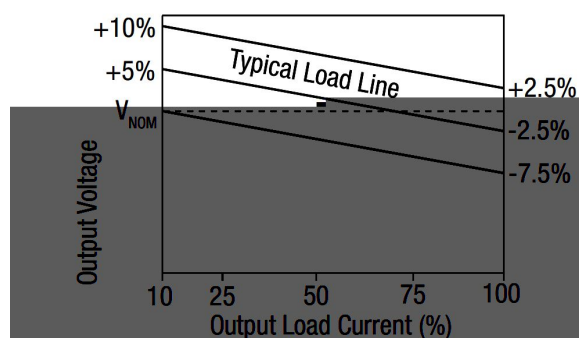

The voltage tolerance envelope shows typical load regulation characteristics for this product series. The tolerance envelope is the maximum output voltage variation due to changes in output loading.

### TLINE Ia ENSI NS & b TMeINT ETAILS


#### a ECmANICAL Ia ENSI NS

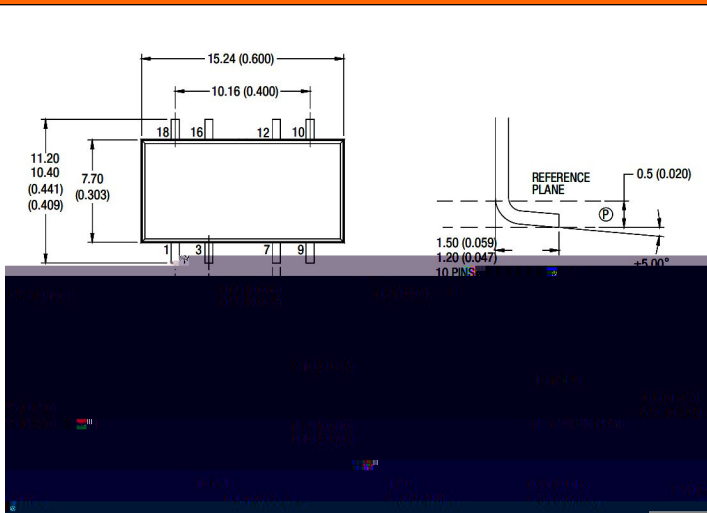

Note:  
Unit:mm[inch]  
Pin section tolerances:±0.10mm[±0.004inch]  
General tolerances:±0.25mm[±0.010inch]

Weight: 1.53g

#### S L Ee MA Ia ENSI N

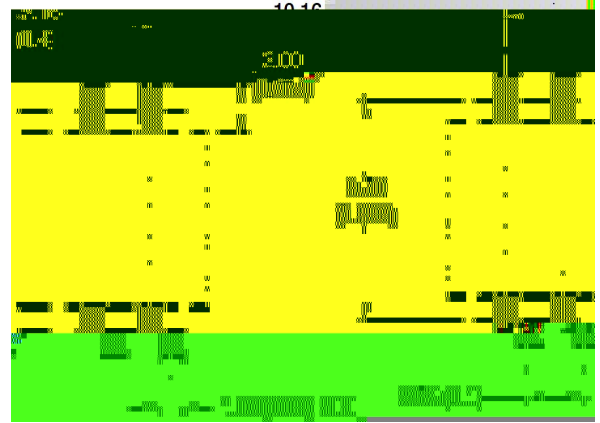


Dimensions in [mm], ( ) = Inch  
Pin pitch tolerances: ±0.13 (±0.005)  
Other tolerances: ±0.25 (±0.01)

#### b TMeINT ETAILS

Pin	Dual
1	-Vin
3	+Vin
7	0V
9	-Vout
10	NA
12	+Vout
16	NA
18	NA

NA - Not available for electrical connection.

#### T xE TLINE Ia ENSI NS

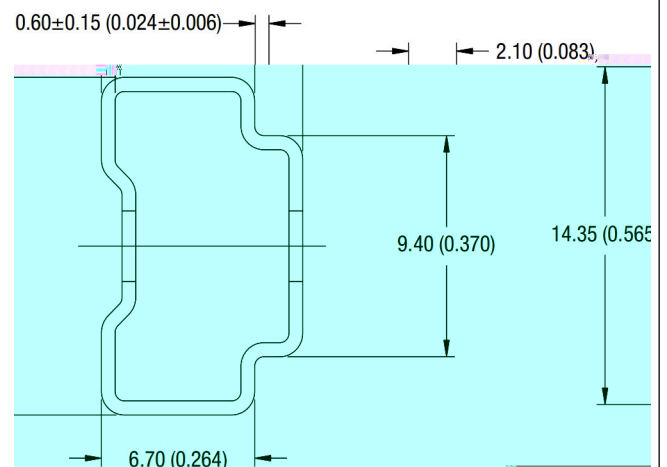

Unless otherwise stated all dimensions in mm±0.5 (inches ±0.02).  
Tube length : 475±2.0 (18.70±0.07). Tube Quantity :25

Specifications can be changed any time without notice.

Note:

1. The load shouldn't be less than 10%, otherwise ripple will increase dramatically.
2. Operation under 10% load will not damage the converter; However, they may not meet all specification listed.
3. All specifications measured at Ta=25°C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
4. In this data sheet, all the test methods of indications are based on corporate standards.
5. Only typical models listed, other models may be different, please contact our technical person for more details.

