


1W, FIXED INPUT, ISOLATED & UNREGULATED DUAL/SINGLE OUTPUT, SUPERMINIATURE SIP PACKAGE

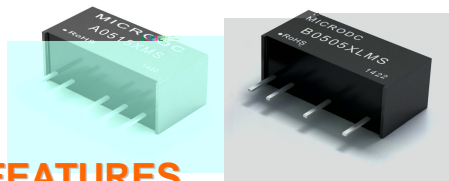

FEATURES

MODEL SELECTION

B^①05^②05^③X^④LMS^⑤

- ① Product Series
- ② Input Voltage
- ③ Output Voltage
- ④ Fixed Input
- ⑤ Package Style

SELECTION GUIDE

Order code	Input		Output			Efficiency (% Typ)	Switching Frequency (KHz Typ)
	Voltage (VDC)		Voltage (VDC)	Current			
	Nominal	Range		Max	Min		
A0505XMS	5	4.5-5.5	±5	±100	±10	70	84
A0509XMS	5	4.5-5.5	±9	±56	±6	75	81
A0512XMS	5	4.5-5.5	±12	±42	±5	78	82
A0515XMS	5	4.5-5.5	±15	±33	±4	79	83
A1205XMS	12	10.8-13	±5	±100	±10	72	180
A1209XMS	12	10.8-13	±9	±56	±6	75	150
A1212XMS	12	10.8-13	±12	±42	±5	77	84
A1215XMS	12	10.8-13	±15	±33	±4	79	83
B0505XLMS	5	4.5-5.5	5	200	20	70	82
B0509XLMS	5	4.5-5.5	9	111	12	75	83
B0512XLMS	5	4.5-5.5	12	83	9	79	83
B0515XLMS	5	4.5-5.5	15	67	7	80	80
B1205XLMS	12	10.8-13	5	200	20	72	84
B1209XLMS	12	10.8-13	9	111	12	75	81
B1212XLMS	12	10.8-13	12	83	9	77	82
B1215XLMS	12	10.8-13	15	67	7	79	83
B2405XLMS	24	21.6-26	5	200	20	70	82
B2409XLMS	24	21.6-26	9	111	12	73	83
B2412XLMS	24	21.6-26	12	83	9	75	83
B2415XLMS	24	21.6-26	15	67	7	78	80
B2424XLMS	24	21.6-26	24	42	5	77	84



CE REACH
MICRODC RESERVES THE COPYRIGHT

COMMON SPECIFICATIONS