


TEMPERATURE CHARACTERISTICS					
P	C	M	T	M	U
S				95	%
O		-40		85	C
S		-55		125	C
L	1.5 10		40	58	C
T				300	C
C		F			
C		P (UL94- 0)			
S	IE- S-2 P		C		
MTBF		3500		1'	S
			5.2		K

Filtering

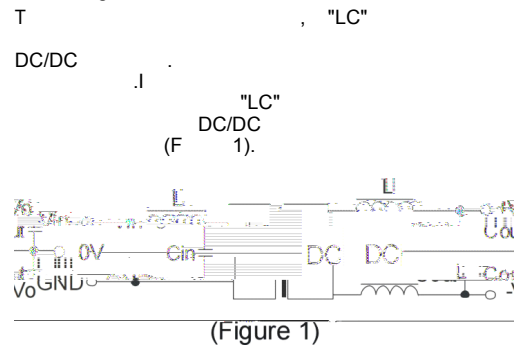

DC/DC

(T 1).

EXTERNAL CAPACITOR TABLE (TABLE 1)

Vin (DC)	Cin (F)	Vout (DC)	Cout (F)
5	4.7	5	4.7
12	2.2	9	2.2
24	0.47	12	1.0

0.5

Overload Protection

U

When the