



Professional Power Module

**WRA-YS-3W & WRB-YS -3W** GYf]Yg

**3W, WIDE INPUT, ISOLATED & REGULATED DUAL/SINGLE OUTPUT DC-DC CONVERTER**

### SELECTION GUIDE

	I		( DC)	C ( A)	E (%. .)
	( DC)	( DC)			

### FEATURES

- (2:1) I
- 
- 
- 
- 
- 
- 
- 
- 
- 
- 
- 
- 
- 
- 
- 

**MODEL SELECTION**  
**WRB<sup>1</sup> 24<sup>2</sup> 12<sup>3</sup> Y<sup>4</sup> S<sup>5</sup> -3W<sup>6</sup>**

I (2:1) I

I

### APPLICATIONS

### Input Specifications





**CE** REACH




**OUTLINE DIMENSIONS & FOOTPRINT DETAILS**

**MECHANICAL DIMENSIONS**

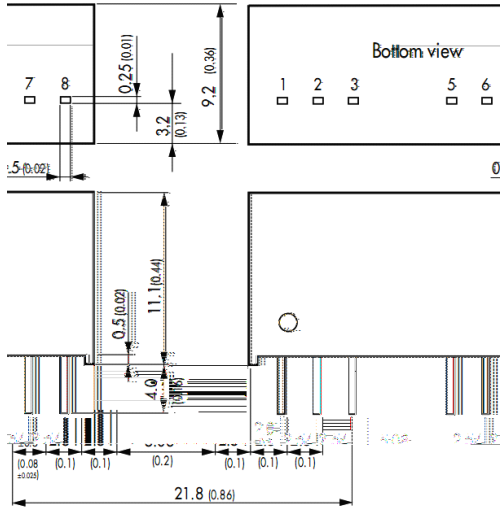


**RECOMMENDED FOOTPRINT**

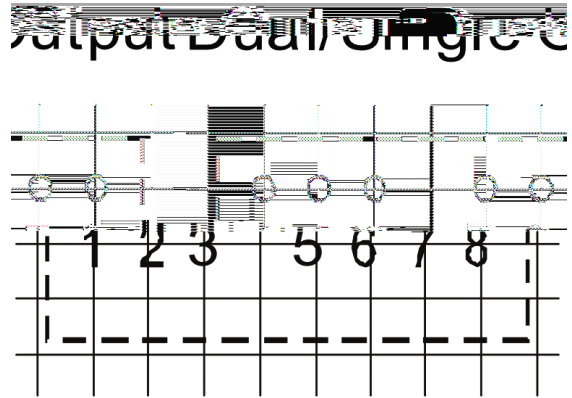

**FOOTPRINT DETAILS**

		D

**TUBE OUTLINE DIMENSIONS**

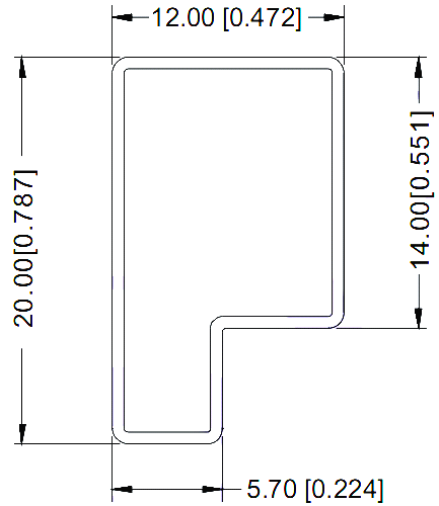

**When the environment temperature is higher than 71 , the product output power should be less than 60% of the rated power.  
No parallel connection or plug and play.**