


TEMPERATURE CHARACTERISTICS


TYPICAL CHARACTERISTICS

0W K

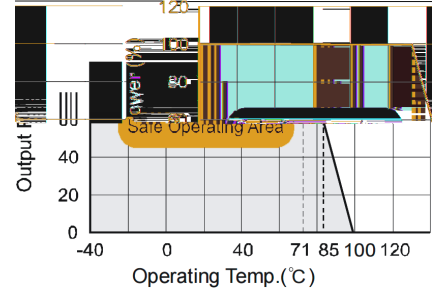

RECOMMENDED CIRCUIT

O G a h

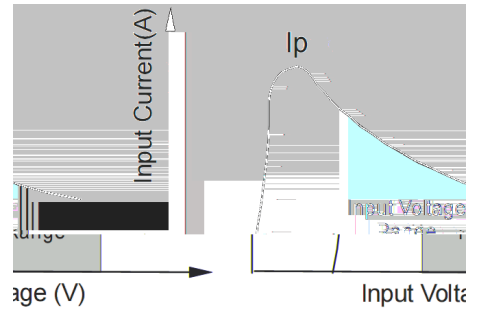


(Figure 2)

Table 1


(VDC)	(F)	(VDC)	(F)
3.3	2200	5	680
5	1000	12	330
12	470	15	220
15	330	--	--

OUTLINE DIMENSIONS & FOOTPRINT DETAILS

MECHANICAL DIMENSIONS

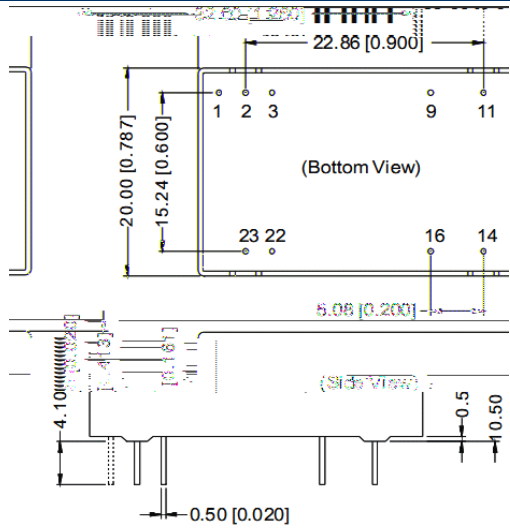


RECOMMENDED FOOTPRINT

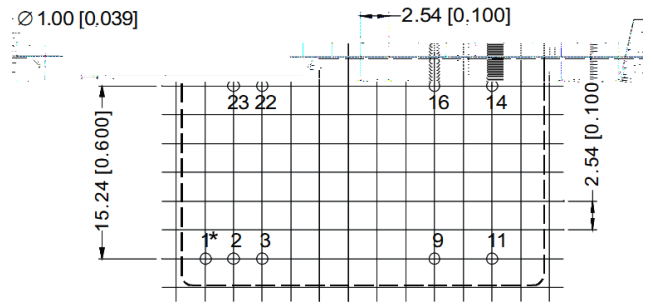

FOOTPRINT DETAILS

Pin	Single	D al

TUBE OUTLINE DIMENSIONS

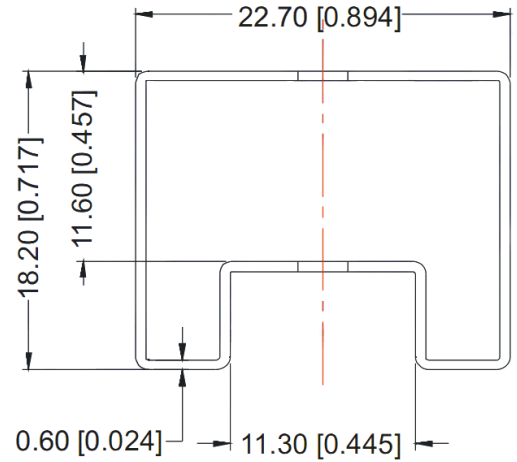

**When the environment temperature is higher than 71 , the product output power should be less than 60% of the rated power.
No parallel connection or plug and play.
Use dual output simultaneously,forbid pening output pin (0V) to use as single output.**