





P S I V
O V R (2:1) I R
M P


				±	±	±		
				±	±	±		
				±	±	±		
				±	±	±		
				±	±	±		
				±	±	±		
				±	±	±		
				±	±	±		
				±	±	±		




CE REACH
MICRODC RESERVES THE COP RIGHT

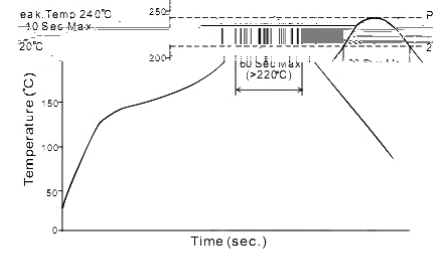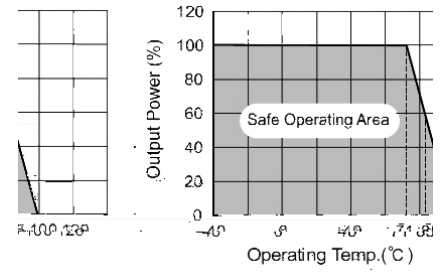

Remark:
The curve applies only to the hot air reflow soldering

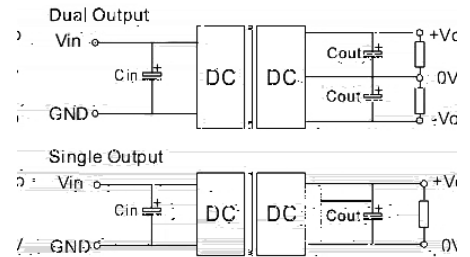

(Figure 1)

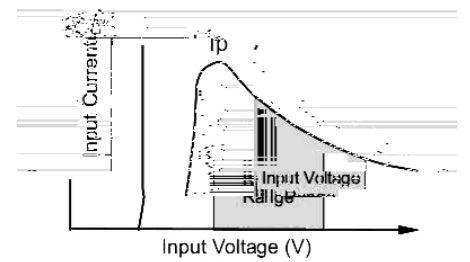

(Figure 2)

(Table 1) Output External Capacitor Table (Table)

Cout (μF)	Single Vout (VDC)	Cout (μF)	Dual Vout (VDC)
680	5	1000	±5
330	12	470	±12
10	33	110	±220

